Battery Charger Series

PowerBase

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.

ROOM 1107, TOWER 1, ENTERPRISE SQUARE PHASE 1,
9 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG

Tel : (852) 2773 9909, 2773 9939
Fax : (852) 2773 9992
E-mail : info@powerbasehk.com

Designation : Switching Rapid Charger

Model No. : C-503

Input Voltage (Universal Switches)	AC 100~240V, 50~60Hz Cable plug-in (UL, VDE, BS, SAA)
Charge Capability	Two or Four ´AA´ NiMH Batteries
	Two or Four ´AAA´ NiMH Batteries
Charge Current	´AA´ (2 or 4 pcs) : 1500mA
	´AAA´ (2 or 4 pcs) : 700mA
Car Adaptor	12V / DC, 2A fuse, (Optional Accessory)
Termination Method	Minus Delta V (-ΔV)
Trickle Charge	Trickle current
Features	International Voltage switching 100~240V LED indicator shows charging status Auto IC control for fully charge Short circuit protection Timer protection

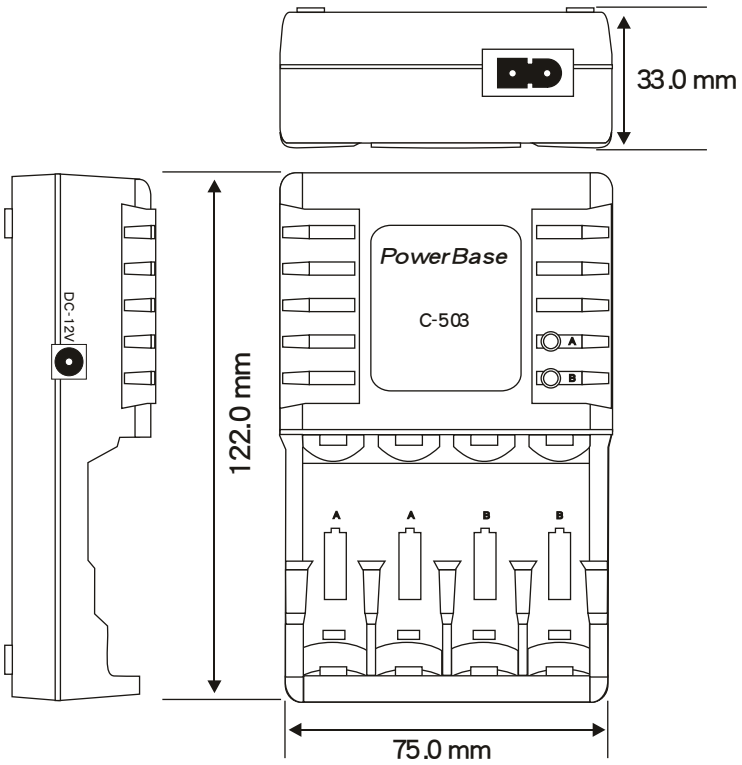

Cord Cable

UL, VDE, SAA, CH, BS

Cigarette Lighter Adaptor

12V / DC

Dimension (Approximate)	122mm(L) x 75mm(W) x 33mm(H)
Weight (Approximate)	Charger : 135 g (without battery)
Housing	PC, ABS Pearl Gray colour

Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs.
Please contact PowerBase for the latest information.