

Battery Charger Series

PowerBase

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.

ROOM 1107, TOWER 1, ENTERPRISE SQUARE PHASE 1,
9 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG

Tel : (852) 2773 9909, 2773 9939
Fax : (852) 2773 9992
E-mail : info@powerbasehk.com

Designation : Powerful Ni-MH & Ni-Cd Battery
Standard Charger

Charge Capability	2 AA/ AAA/ 9V NiMH/NiCd Batteries
Input Voltage	DC 230V / 50 Hz
Charge Current	9V= 50mA "AA" 2.8V, 130mA "AAA" 2.8V, 130mA
Pin Type	VDE Plug/ UL (Foldable)
Features	LED indicate in charging state

Charger Dimension :


Approximate Dimension	95mm (L) x 45mm (W) x 70 mm (H)
Approximate Weight	Charger : 113 g(without battery)
Housing	ABS (White colour)

Battery Charge Time :

Chemistry & Size	Battery Capacity	*Charging Time (Approximate)
Ni-MH AA	2500 mAh	20 hours
Ni-MH AA	2300 mAh	18 hours
Ni-MH AA	1800 mAh	14 hours
Ni-MH AAA	800 mAh	6 hours

* The charging time is only for generally reference. The detail of battery capacity of charging time request. Please see the PowerBase battery specification and contact PowerBase for the latest information.

Model No. : **C-427** (VDE, White)

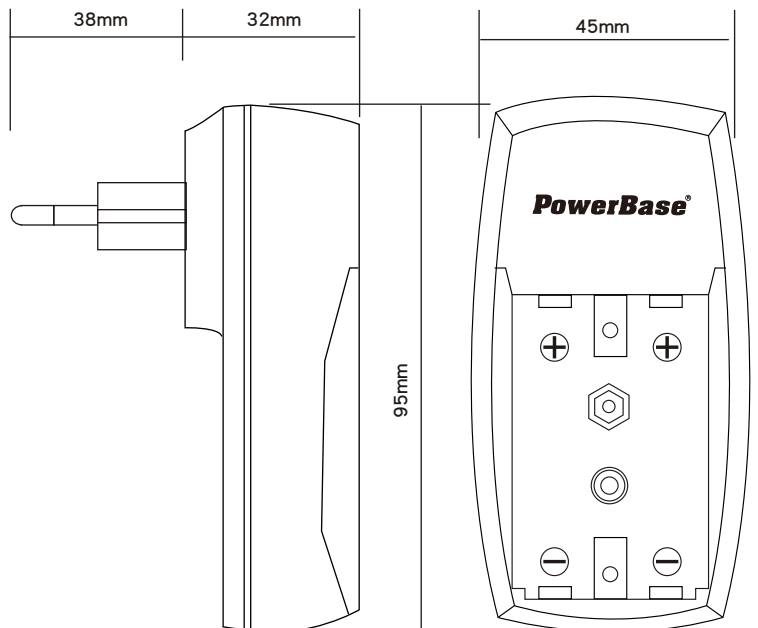

Individual Data sheet

This specifications is only for generally reference, about the cells and batteries performance, warranty, modification/designs. Please contact PowerBase for the latest information.

PowerBase[®]